



Daktronics ALL SPORTS:

- 1600 bot
 - 3000 bot
 - 4000 bot
 - 5000 bot
-

The package contents

The package contains the following:

- Sportzcast bot.
 - Power supply.
 - Scoreboard serial interface cable.
 - Installation instruction document.
-

Installation instructions

Please follow the instructions below when installing your Sportzcast bot.

Mounting the bot

1. The bot should be mounted near the Daktronics scoreboard control unit or suitable interface location. This may be under the press box or scoreboard operations table. It also may be in an equipment room where Daktronics signal processing is performed.
It should be secured so power and associated interface cables are not kicked out or accidentally disconnected.
Make sure to mount the bot so the supplied power and interface cable will reach their connection point.
 2. Ideally the bot should be screwed down under the console using the attached mounting bracket.
It may also be mounted inside the Daktronics equipment rack. General mounting hardware and cable dressing harnesses are not supplied.
 3. A different scoreboard interface cable will be supplied based on the interface type. Your interface type will be checked based on the site survey form you previously submitted.
-

Power and Internet connection

1. Connect a wired internet connection to the jack labeled Internet on the ScoreBot.
2. Plug the power connector into the Scorebot jack labeled Power.
3. Plug in the Scorebot power supply into the nearest 120VAC wall socket.



Please, refer to Image 1 below for an illustration for proper installation of power and the internet connection.

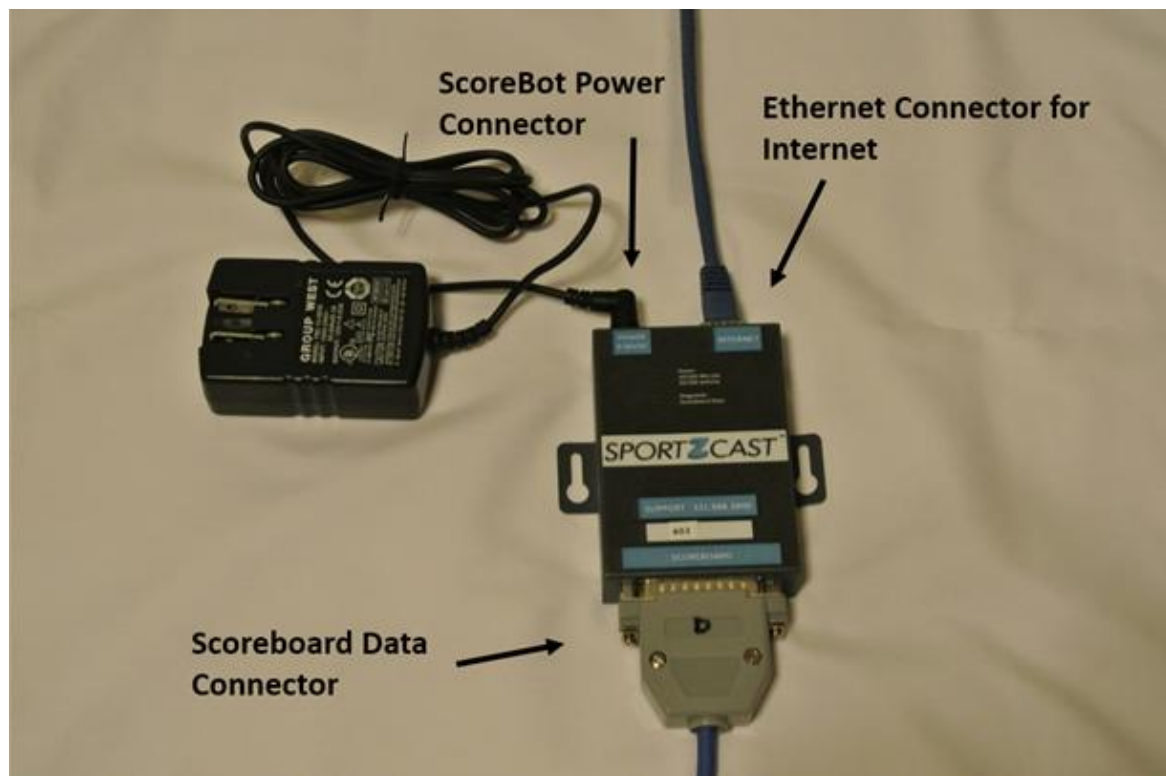


Image 1

Viewing the data

1. Turn on the scoreboard control console and enter simulated game data. This may be a scoreboard entry or by simply starting the clock.
2. Open up LiveXML and enter your bot number in the designated box. Make sure that the bot is connected and that data is coming through.
3. This cable and connection option is for direct connection to J1, J2, or J3 on the back of the Daktronics 3000 or 5000 scoreboard controller.
 - a. Plug the ¼" phone plug from one end of the supplied cable into a spare jack (J1, J2, or J3) on the back of the Daktronics scoreboard controller.
 - b. Plug the other end to the serial port on the Scorebot. Screw down the DB25 connector to prevent it from being unplugged.

Please, refer to Image 2 for an illustration on proper installation.

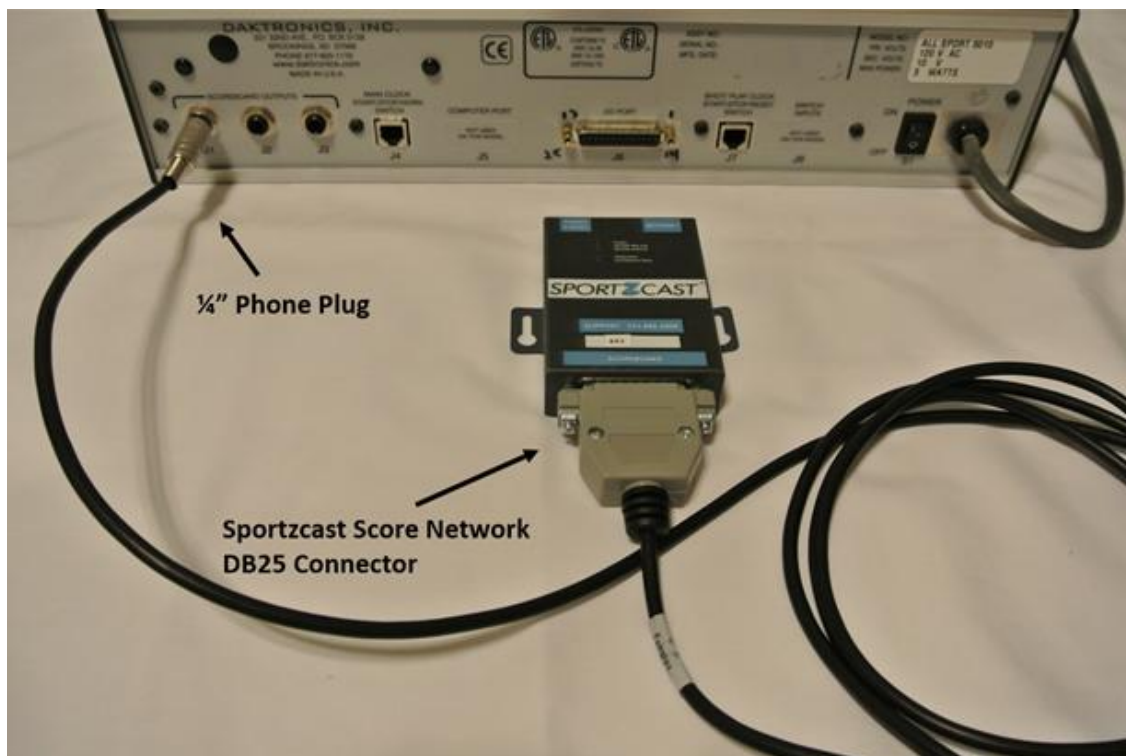


Image 2

For assistance, please contact Sportzcast Support:

sportzcastcs@geniussports.com

321-888-3800